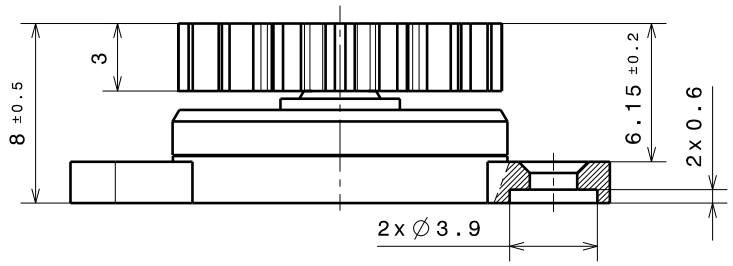

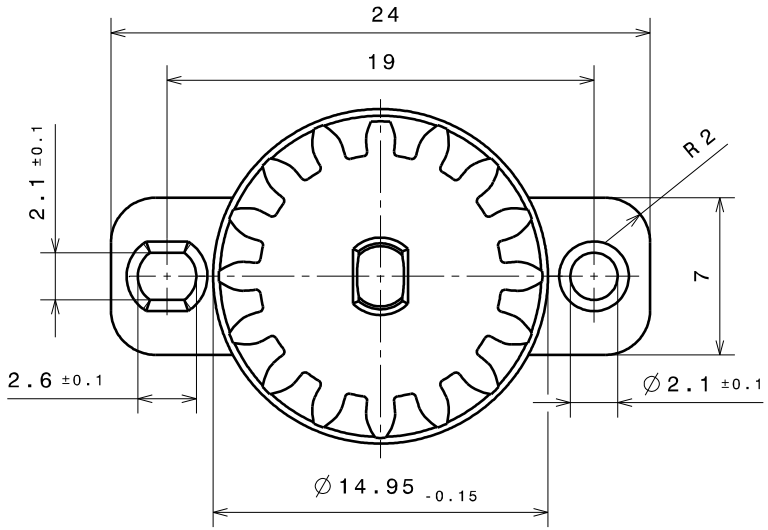



Torque at RT and 20 rpm	Torque ID
2.50 ± 0.29 Ncm	I
2.20 ± 0.26 Ncm	M
1.50 ± 0.17 Ncm	F
1.10 ± 0.13 Ncm	L
0.95 ± 0.11 Ncm	Z
0.70 ± 0.08 Ncm	D
0.55 ± 0.08 Ncm	E
0.45 ± 0.09 Ncm	S
0.25 ± 0.06 Ncm	Y
0.15 ± 0.07 Ncm	H

GEAR SPECIFICATION	
tooth engagement	20°
module	0.8
number of teeth	16

G SMALL STANDARD DAMPER

30329

16 tooth gear

PART NO. 30329-9-0X-0XX

All Rights Reserved

For further technical information, please contact your local representative by using the attached contact list.